
APF JET FILTER

Model JF-50000 2.5"



Α	4.15"
В	0.70"
С	0.83"
D	0.38"
Е	0.375"
F	4.50"
G	3.00"
Н	3.50"
J	2.25"
K	0.291"
L	0.50"
М	0.85"
N	0.40"
Р	1.80"
R	2.095"
S	2.14"
Т	3.466"
U	7.342"
٧	45.31°
W	2.67"
Х	5.656"
Υ	3.876"

1	Powder coat assembly
2	Cage Cap
3	Cage
4	Ring Plate
5	Face Plate

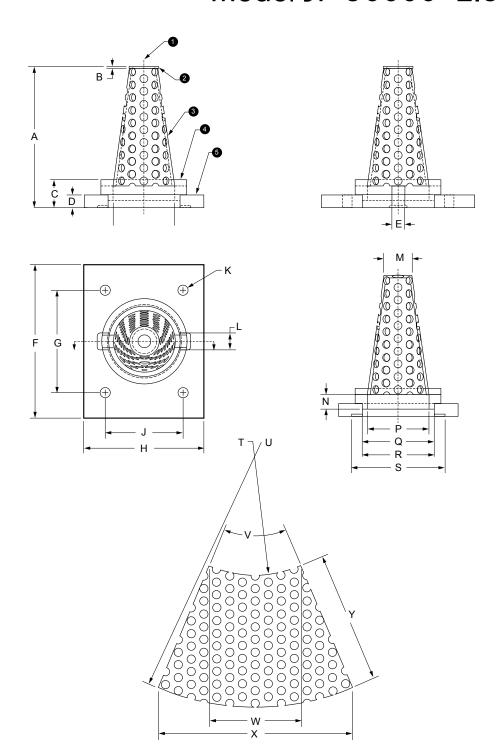

45 Samworth Road, Clifton, NJ 07014

Tel: 973-773-8400

Fax: 973-773-8442

email: apf@associatedpile.com

www.associatedpile.com

Call Toll Free: 800-526-9047

APF JET FILTER – INSTALLATION DETAIL


Water Level Prior to APF JET Filter Installation

HIGH TIDE LOCATION Steel Sheet Piling Pre-Drill Pilot Hole 15/64" or 7/32" Attach SS Mounting **Anchors Supplied** 4" diameter Landward Side APFJF4SS* Maintainable and Recommended Cleanable Filter "French Drain" Media Cartridge #57 Crushed Stone Position @ 3-6" Above Core Weep Hole Mean Water Line 2.5", 4" or 6" diameter Waterside

Prepare the installation locations by ensuring the wall is smooth and level to allow the filter housing to install flush with the wall. Core a hole so that the bottom rim of the unit is 2-4 inches above the mean waterline or soil line. Core through the thickness of the wall and far enough for the housing to slide fully into the wall. Please note, if there is an algae or barnacle line, ensure the housing is 2-4" above this line. Insert the APF JET Filter housing into the cored hole. Rotate the housing unit so the APF logo is positioned at the top. For best results, a flowable material such as crushed #57 stone should be placed behind the wall around the filter. For installations where digging behind the wall is not possible and no flowable material exist at the installation locations, consider coring further into the ground and packing flowable material such as sand, pea gravel, crushed stone etc. through the core entry hole prior to filter installation. Mount the housing unit to the wall by pre-drilling 15/64" or 7/32" pilot holes into the wall using the existing holes in the housing as a

guide. Attach the housing to wall with the provided stainless steel, self-drilling screws through the housing plate holes into the wall.

Water Level After APF JET Filter Installation





Standard Weep Hole Component Installation Detail

US PAT#7,615,148 Made in the USA